

# DH-HAC-HDW3103C


## 1.3Megapixel 720P Water-proof IR HDCVI Mini Dome Camera



### Features

- 1/3" 1.3Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switch
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 2.8~8mm sync focus lens, motorized zoom
- Max. IR LEDs length 30m, Smart IR
- IP66, DC12V

### Dimensions (mm)

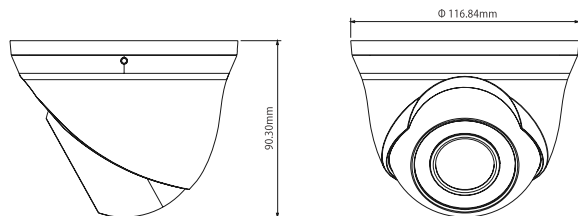

### Accessories (optional)



### Technical Specifications

Model	DH-HAC-HDW3103CP	DH-HAC-HDW3103CN
<b>Camera</b>		
Image Sensor	1/3" 1.3Megapixel CMOS	
Effective Pixels	1280(H)×960(V)	
Electronic Shutter	4/25s~1/45,000s	4/30s~1/54,000s
Video Frame Rate	1280×720@25 fps; 1280×720@30 fps; 1280×720@50 fps; 1280×720@60 fps	
Synchronization	Internal	
Mini. Illumination	Color: 0.01Lux@F1.2(AGC ON), 0Lux@F1.2 (IR on)	
Video Output	1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch)	
<b>Camera Features</b>		
Max. IR LEDs Length	30m, Smart IR	
Day/Night	Auto(ICR) / Color / B/W	
Noise Reduction	2D/3D	
OSD Menu	Support	
<b>Lens</b>		
Focal length	2.8~8mm sync focus lens, motorized zoom	
Mount Type	Φ14	
<b>General</b>		
Power Supply	DC12V±10%	
Power Consumption	Max 8.8W	
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)	
Transmission Distance	Over 500m via 75-3 coaxial cable	
Ingress Protection	IP66	
Dimensions(W×D×H)	116.84mm×90.3mm	
Weight	0.7kg	