

DH-HAC-HFW2100E



1.3Megapixel 720P Water-proof HDCVI IR-Bullet Camera



Features

- 1/3" 1.3Megapixel CMOS
- 25/30/50/60fps@720P
- High speed, long distance real-time transmission
- HD and standard definition switch
- OSD Menu, control over coaxial cable
- Day/Night(ICR), AWB, AGC, BLC, 3D-DNR
- 6mm fixed lens (2.8 mm, 3.6mm, 8mm optional)
- Max. IR LEDs length 20m, Smart IR
- IP66, DC12V

Dimensions (mm)

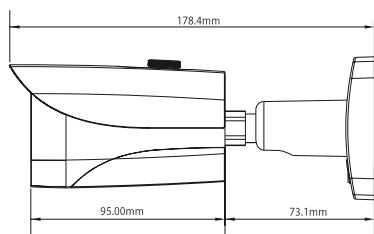

Technical Specifications

| Model | DH-HAC-HFW2100EP | DH-HAC-HFW2100EN |
|------------------------|--|------------------|
| Camera | | |
| Image Sensor | 1/3" 1.3Megapixel CMOS | |
| Effective Pixels | 1280(H)×960(V) | |
| Electronic Shutter | 4/25s~1/45,000s | 4/30s~1/54,000s |
| Video Frame Rate | 1280×720@25 fps; 1280×720@30 fps; 1280×720@50 fps; 1280×720@60 fps | |
| Synchronization | Internal | |
| Mini. Illumination | 0.01Lux@F1.2(AGC ON), 0Lux IR on | |
| Video Output | 1-channel BNC HDCVI high definition video output/ CVBS standard definition video output (Can switch) | |
| Camera Features | | |
| Max. IR LEDs Length | 20m, Smart IR | |
| Day/Night | Auto(ICR) / Color / B/W | |
| Noise Reduction | 2D/3D | |
| OSD Menu | Support | |
| Lens | | |
| Focal length | 6mm fixed lens (2.8mm, 3.6mm, 8mm optional) | |
| Mount Type | M12 | |
| General | | |
| Power Supply | DC12V±10% | |
| Power Consumption | Max 4.2W | |
| Working Environment | -30°C~+60°C / Less than 95%RH (no condensation) | |
| Transmission Distance | Over 500m via 75-3 coaxial cable | |
| Ingress Protection | IP66 | |
| Dimensions(W×D×H) | 178.4mm×69.9mm×70.0mm | |
| Weight | 0.5kg | |